



The Keysight Technologies, Inc. N28xxA/B low-cost, general-purpose passive probes provide up to 500 MHz bandwidth and feature a high input resistance of 10 M Ω for low probe loading. These probes provide a 10:1 attenuation ratio except for the N2889A which provides a switch in the probe handle for switching the attenuation ratio between 1:1 and 10:1.

The probes are compatible with Keysight InfiniiVision and Infiniium Series oscilloscopes with 1 $\mbox{M}\Omega$ BNC input.

The N284xA Series passive probes are the frequency tuned versions of the N2862B/63B/89A/90A, offering more linear frequency response with Keysight oscilloscopes.



N2840A/41A/42A/43A/53A

Characteristics

N2840A	N2862B/N2841A	N2863B /N2842A/N2853A	N2889A	N2890A/N2843A
50 MHz	150 MHz	300 MHz (N2863B, N2842A),	350 MHz (at 10:1),	500 MHz
		350 MHz (N2853A)	10 MHz (at 1:1)	
7 nsec	2.33 nsec	1.16 nsec (N2863B, N2842A),	1 nsec (at 10:1),	700 psec
		1 nsec (N2853A)	35 nsec (at 1:1)	
10:1	10:1	10:1	1:1/10:1 (switchable)	10:1
10 MΩ	10 MΩ	10 ΜΩ	10 MΩ (at 10:1),	10 ΜΩ
			1 MΩ (at 1:1)	
15 pF	15 pF	11 pF	11 pF (at 10:1),	11 pF
			60 pF (at 1:1)	
300 V RMS	300 V RMS	300 V RMS (or > 400 Vpk)	300 VRMS (or > 400 Vpk)	300 V RMS
(or > 400 Vpk)	(or > 400 Vpk)	CAT I and CAT II	CAT I/II (at 10:1),	(or > 400 Vpk)
CAT I and CAT II	CAT I and CAT II		150 V RMS CAT I/II (at 1:1)	CAT I and CAT II
5-30 pF	5-30 pF	5-30 pF	5-30 pF (at 10:1)	5-30 pF
Yes	Yes	Yes	No	Yes
1.2 m	1.2 m	1.2 m (N2863B, N2842A),	1.3 m	1.3 m (N2890A),
		2 m (N2853A)		1.2 m (N2843A)
Conformance to IEC-61010-031:2002				
0 to 50 °C, 80% RH				
0 to 50 °C, 80% RH				
	50 MHz 7 nsec 10:1 10 MΩ 15 pF 300 V RMS (or > 400 Vpk) CAT I and CAT II 5-30 pF Yes 1.2 m Conformance to IEC- 0 to 50 °C, 80% RH	50 MHz 150 MHz 50 MHz 150 MHz 7 nsec 2.33 nsec 10:1 10:1 10 MΩ 10 MΩ 15 pF 15 pF 300 V RMS 300 V RMS (or > 400 Vpk) (or > 400 Vpk) CAT I and CAT II CAT I and CAT II 5-30 pF 5-30 pF Yes Yes 1.2 m 1.2 m Conformance to IEC-61010-031:2002 0 to 50 °C, 80% RH	50 MHz 150 MHz 300 MHz (N2863B, N2842A), 350 MHz (N2853A) 7 nsec 2.33 nsec 1.16 nsec (N2863B, N2842A), 1 nsec (N2853A) 10:1 10:1 10:1 10 MΩ 10 MΩ 10 MΩ 15 pF 15 pF 11 pF 300 V RMS 300 V RMS 300 V RMS (or > 400 Vpk) (or > 400 Vpk) (or > 400 Vpk) CAT I and CAT II CAT I and CAT II CAT I and CAT II 5-30 pF 5-30 pF 5-30 pF 5-30 pF 1.2 m 1.2 m 1.2 m (N2863B, N2842A), 2 m (N2853A) Conformance to IEC-61010-031:2002 0 to 50 °C, 80% RH	50 MHz 150 MHz 300 MHz (N2863B, N2842A), 350 MHz (N2853A) 350 MHz (at 10:1), 10 MHz (at 1:1) 7 nsec 2.33 nsec 1.16 nsec (N2863B, N2842A), 1 nsec (N2853A) 1 nsec (at 10:1), 35 nsec (at 1:1) 10:1 10:1 10:1 1:1/10:1 (switchable) 10 MΩ 10 MΩ 10 MΩ 10 MΩ (at 10:1), 1 MΩ (at 10:1), 60 pF (at 10:1), 60 pF (at 11) 300 V RMS 300 V RMS 300 V RMS (or > 400 Vpk) 300 V RMS (or > 400 Vpk) (or > 400 Vpk) (or > 400 Vpk) CAT I and CAT II CAT I and CAT II 5-30 pF 5-30 pF 5-30 pF 5-30 pF (at 10:1)) 5-30 pF 1.2 m 1.2 m 1.2 m (N2863B, N2842A), 2 m (N2853A) 1.3 m Conformance to IEC-61010-031:2002 0 to 50 °C, 80% RH U U U

Compensation Adjustments

These probes can be adjusted for low-frequency and high-frequency compensation. For the best measurement results you should compensate your probe to match its characteristics to the oscilloscope. A poorly compensated probe can introduce measurement errors. Low-frequency compensation should be performed before performing high-frequency compensation.

Low-frequency compensation


- 1. Connect the probe from the appropriate oscilloscope channel to the 1-kHz square wave source.
- 2. Press Autoscale. Adjust the oscilloscope to display two to three cycles of the waveform over two to six vertical divisions.
- 3. Set the low-frequency (LF) compensation adjustment on the probe for the flattest pulse possible (see Figure 3).







Figure 2. Low-frequency compensation adjustment (for N2840A/41A/42A/43A/53A)











Incorrect









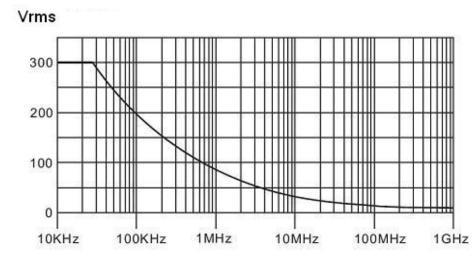



Accessories



Standard accessories

Item	Description	Quantity
1	Retractable hook	1
2	Adjustment tools	2 (with N2889A/90A)
		1 (with all others)
3	Insulating cap	1
4	IC insulating cap	1
5	Identification tags (green,yellow, purple and pink)	2 each
6	Probe tip	2
7	Ground spring	1
8	BNC adapter	1
9	Ground lead (black 12 cm)	1

N2856A passive probe accessory kit

The N2856A passive probe accessory kit includes all of the standard accessories for the N2840A, N2841A, N2842A, N2843A, and N2853A passive probes.


Contents:

- Retractable hook
- Adjustment Tools
- Insulating cap
- IC insulating cap
- Identification tags (green, yellow, purple, and pink) (2 each)
- Probe tips
- Ground spring
- BNC adapter
- Ground lead (12 cm)


Accessories (Continued)


Replacement accessories

- N2857A alligator ground lead (qty 1)
- N2858A retractable hook tip adapter (qty 1)
- N2859A replaceable probe tip (qty 1)
- N4826A dual lead adapter (qty 2)
- N4827A PCB socket adapter (qty 2)
- N4828A ground spring, 5 mm (qty 2)

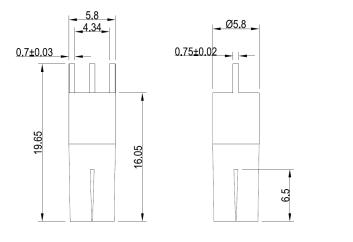








unit : mm

Figure 5. N4827A PCB socket adapter dimension and foot print information.

Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. We are unlocking the future of technology.





From Hewlett-Packard to Agilent to Keysight



myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

KEYSIGHT SERVICES Accelerate Technology Adoption Lower costs.

Keysight Services

myKeysight

www.keysight.com/find/service

Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. The business that became Keysight was a founding member of the LXI consortium.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product guality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/probes



Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

1 800 629 485
800 810 0189
800 938 693
1 800 11 2626
0120 (421) 345
080 769 0800
1 800 888 848
1 800 375 8100
0800 047 866
(65) 6375 8100

Europe & Middle East

United Kingdom

0800 0260637

For other unlisted countries: www.keysight.com/find/contactus (BP-11-29-16)



www.keysight.com/go/quality Keysight Technologies, Inc. DEKRA Certified ISO 9001:2015 Quality Management System



